



Submittal Data Sheet

4.5-Ton Multi Position Air Handling Unit

FXTQ54TAVJUA

FEATURES

- Capable of upflow, horizontal-right, horizontal-left, and downflow installation. Downflow installation requires the use of a field installed downflow accessory kit.
- Variable speed ECM motor produces nominal CFM up to 0.9â€ external static pressure
- Improved auxiliary heat logic
- Designed with less than 2% air leakage when tested in accordance with ASHRAE 193
- All-aluminum coil
- Precise refrigerant modulation from a 2000 pulse electric expansion valve
- Cool, Dry, Auto, Heat, and Fan operation modes
- Auto Fan Speed automatically adjusts fan speed in relation to space temperature and set point
- Configurable Dry mode
- Optional slide-in electric heat available up to 25 kW

BENEFITS

- Optimized fan speed from Auto Fan Speed logic
- Reduced auxiliary heat dead band
- Configurable electric heat on/off temperature settings
- Compact footprint fits tight spaces





Submittal Data Sheet

4.5-Ton Multi Position Air Handling Unit

FXTQ54TAVJUA

PERFORMANCE

Indoor Unit Model No.	FXTQ54TAVJUA	Indoor Unit Name:	4.5-Ton Multi Position Air Handling Unit
Type:	Ducted	Rated Cooling Conditions:	Indoor (°F DB/WB): 80 / 67 Ambient (°F DB/WB): 95 / 75
Rated Cooling Capacity (Btu/hr):	54,000	Rated Heating Conditions:	Indoor (°F DB/WB): 70 / Ambient (°F DB/WB): 47 / 43
Sensible Capacity (Btu/hr):	39,300	Rated Piping Length(ft):	
Cooling Input Power (kW):	0.680	Rated Height Separation (ft):	
Rated Heating Capacity (Btu/hr):	60,000		
Heating Input Power (kW):	0.68		


INDOOR UNIT DETAILS

Power Supply (V/Hz/Ph):	208-230 / 60 / 1	Airflow Rate (H/M/L) (CFM):	1,800/1,530/1,260
Power Supply Connections:		Moisture Removal (Gal/hr):	
Min. Circuit Amps MCA (A):	8.60	Gas Pipe Connection (inch):	5/8
Max Overcurrent Protection (MOP) (A):	15.00	Liquid Pipe Connection (inch):	3/8
Dimensions (HxWxD) (in):	58 x 24.5 x 21	Condensate Connection (inch):	3/4
Panel (HxWxD) (in):		Sound Pressure (H) (dBA):	50
Net Weight (lb):		Sound Power Level (dBA):	59
Panel Weight (lb):		Ext. Static Pressure (Rated/Max) (inWg):	0.90 / 0.90



Submittal Data Sheet
4.5-Ton Multi Position Air Handling Unit
FXTQ54TAVJUA

DIMENSIONAL DRAWING

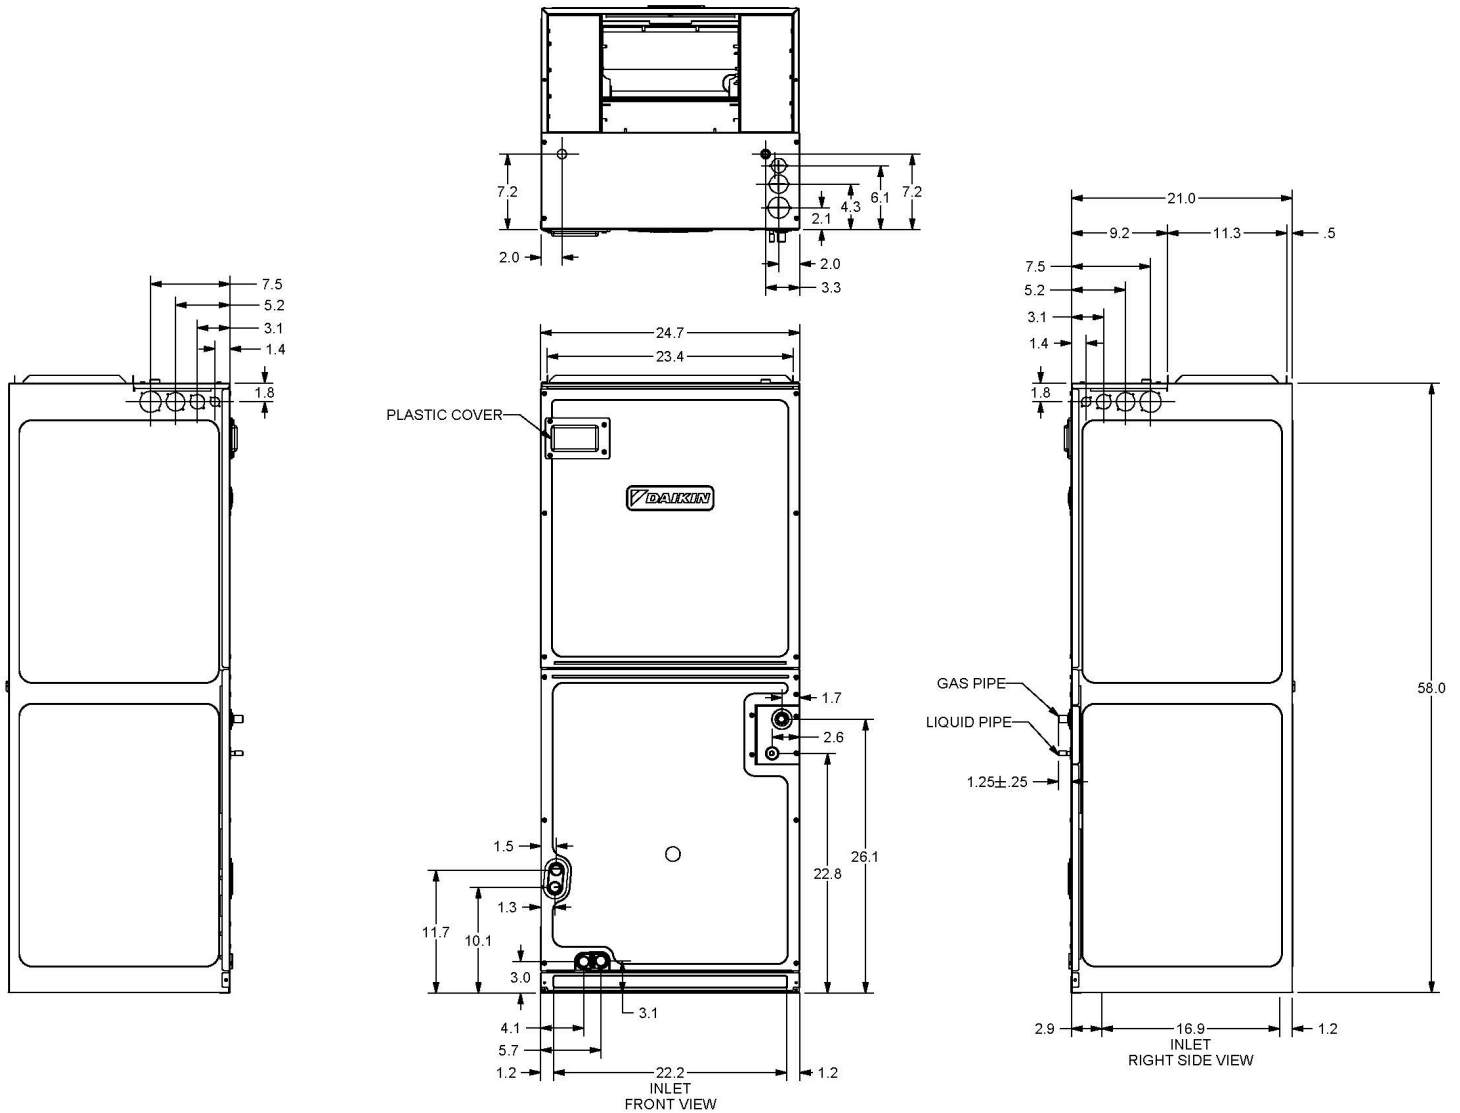

FXTQ54/60 TAVJU

LSM - Yanmar Distributor

Direct (250) 878-1666
Office (800) 663-1753

www.lsm-cogeneration.com

www.daikinac.com www.daikincomfort.com